




# SINGLE STAGE VERTICAL TYPE "AF" AXIAL FLOW PUMP BELT DRIVE

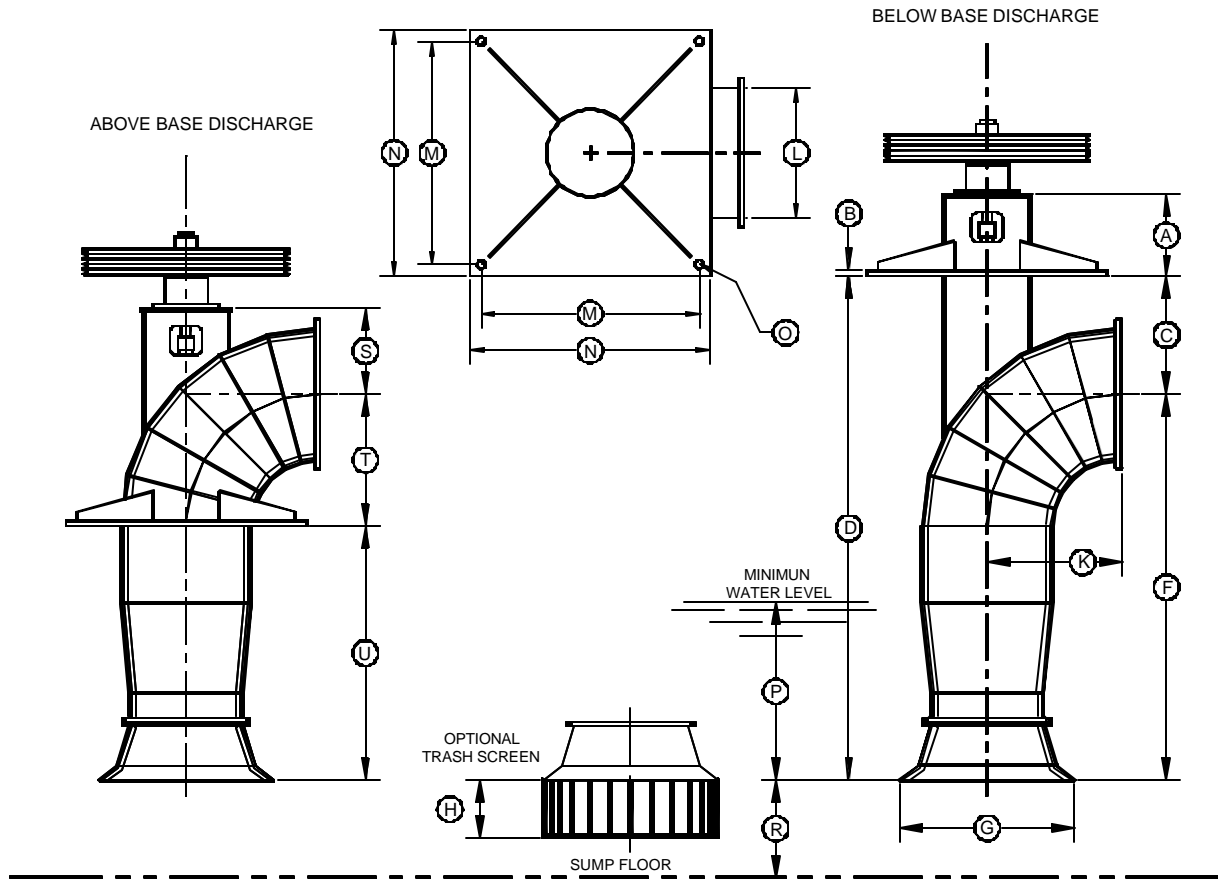

## STANDARD DIMENSIONS IN INCHES

PUMP SIZE	A MIN.	B	C MIN.	D MIN.	F MIN.	G	H	K	L	M	N	O	P	R	S MIN.	T MIN.	U MIN.	PUMP SIZE
8	12	3/8	6	30	24	12	6	12	8-5/8	18	20	9/16	24	8	6	12	12	8
10	12	3/8	7	34	27	15	6	12	10-3/4	20	22	9/16	24	8	6	12	15	10
12	12	3/8	8	43	35	16	6	14	12-3/4	22	24	9/16	24	8	8	14	21	12
14	12	3/8	9	49	40	18	6	15	14	26	28	9/16	27	9	8	15	25	14
16	15	1/2	10	59	49	21	8	18	16	30	32	9/16	32	10	8	18	31	16
18	15	1/2	11	63	52	24	10	21	18	32	34	9/16	36	12	9	21	31	18
20	15	1/2	12	68	56	27	10	25	20	34	36	9/16	41	13	10	25	31	20
24	15	1/2	14	74	61	32	14	30	24	44	48	9/16	48	16	12	30	31	24
30	15	3/4	17	101	84	39	16	40	30	50	54	9/16	59	19	15	40	44	30
36	18	3/4	21	121	100	45	20	48	36	56	60	11/16	68	22	18	48	52	36
42	18	3/4	24	131	107	54	24	53	42	62	66	11/16	81	27	21	53	54	42
48	18	3/4	27	134	107	63	28	53	48	68	72	13/16	95	31	24	53	54	48
54	18	3/4	30	145	120	72	32	60	54	77	81	13/16	108	36	27	60	60	54
60	24	3/4	33	155	122	81	36	60	60	86	90	13/16	120	40	30	60	62	60
72	24	3/4	39	183	144	99	36	72	72	104	108	13/16	148	49	36	72	72	72

### NOTES:

DIMENSIONS A,B,C,D,F,S,T & U ARE MINIMUM FOR STANDARD CONSTRUCTION.  
CONSULT FACTORY FOR CUSTOM CONFIGURATIONS TO SUIT YOUR APPLICATION.  
PUMP DISCHARGE CAN BE FLANGED OR PLANE END FOR DRESSOR STYLE COUPLINGS.